


# B4-I/KA

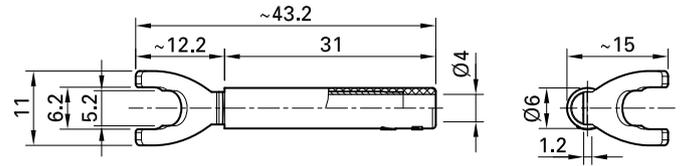

Item number 23.0440-\*

Made of brass for permanent installation, e.g. for connecting screw terminals.  $\varnothing 4$  mm rigid socket in insulator accepting spring-loaded  $\varnothing 4$  mm plugs with rigid insulating sleeve. Fork lug bent to an angle of  $45^\circ$ .

Technical data	
Diameter of plug system	4 mm
Rated Values	1000 V, CAT II, 20 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Standard color(s) *	<span style="background-color: black; color: white;">21</span> <span style="background-color: red; color: white;">22</span> <span style="background-color: blue; color: white;">23</span> <span style="background-color: yellow; color: black;">24</span>
Test accessory acc. to	IEC EN 61010-031
User-Information	I011

**DONHO**  
唐和股份有限公司

台北公司  
台北市內湖區瑞光路618號8樓  
02 2627 1088



萬和儀器有限公司  
ONEHO INSTRUMENT LTD.

台中公司  
台中市西屯區朝富路213號23樓-2(A5)  
04 2238 8896

高雄分公司  
高雄市楠梓區德民路220號  
07 365 1388