

Possibility of AC 5kV, DC 5kV Withstand Voltage test  
Available with Remote control function, Status Output, RS- 232C

# AC/DC Withstand Voltage Tester

## Model 8526



■ Withstand Voltage Tester

AC5kV  
500VA

■ I/O Control

DC5kV  
50W

External  
Control I/O

■ Data Output

Status  
Output

RS-232C

# AC 5kV and DC 5kV in a Withstand Voltage Tester



## ■ Outline

The model 8526 is an equipment having capability of measuring both AC and DC withstand voltage condition. Building in AC 5kV (Output capacity 500VA) and DC 5kV (Output capacity 50W), withstand voltage of any electric equipment can be measured based our safety standards.

### Typical Application:

Motor and Generator, spark plugs, Capacitors, connectors etc. aviation components, transformers, wire and cables, coils, switches and relays


## ■ Characteristics

- Performs both AC5kV and DC5kV of withstand voltage test.
- Support various tests based on the safety standard of Electrical Appliance and Material Safety Law etc.
- Safety oriented design interlock etc.
- Memory function with 9 types of test condition.
- Status output for test condition and result.
- Large LED to display test condition and measured value.
- Output of Test condition and results are done by RS-232C.

### Specification

- AC Withstand voltage test
  - Voltage output: AC 0 to 2.5kV / 0 to 5kV (500VA)
  - Setting of upper limit leakage current: 0.1 to 110.0mA
  - Judgment method: Upper and lower limit comparator
- DC withstand voltage test
  - Output voltage: DC 0 to 2.5kV/0 to 5kV (50W)
  - Setting of upper leakage current: 0.1 to 11.0mA
  - Judgment method: Upper and lower limit comparator.
- Output: Status signal, RS-232C output.

## ■ Back Panel

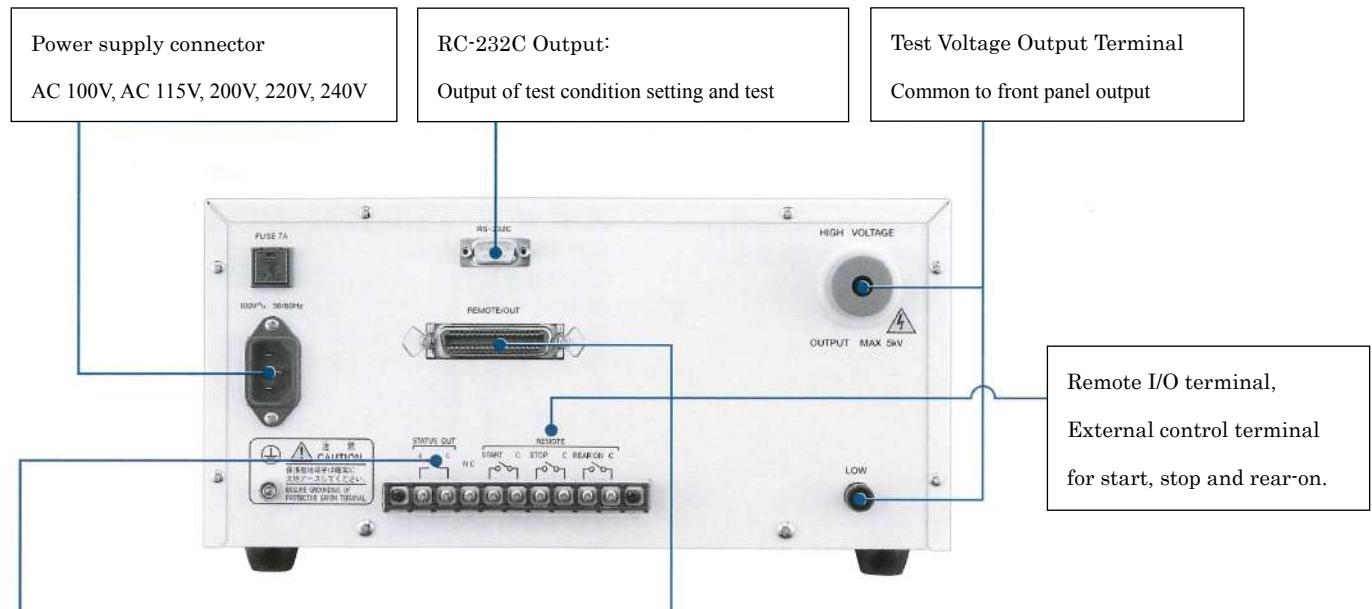

### ■ Status Output

Output Name	Output cond.
TEST/H.V.OUT	Test voltage output
TEST	Under test
GOOD	Good judgement
NG	Bad judgement
POWER ON	Power On
READY	During Ready
REMOTE	Remote Operation

Pin No. 1 to 36 are available for

Remote I/O connector.


(See the user's manual for details)

Depending on selection of output, relay contact output is available (Multiple selection is possible (OR Cond.)

Output signal: 1a contact point, AC250V 1A, DC30V 1A (resistance load)

## ■ Outline Drawing

Rack installation panel: 5871-03-015 (Option)

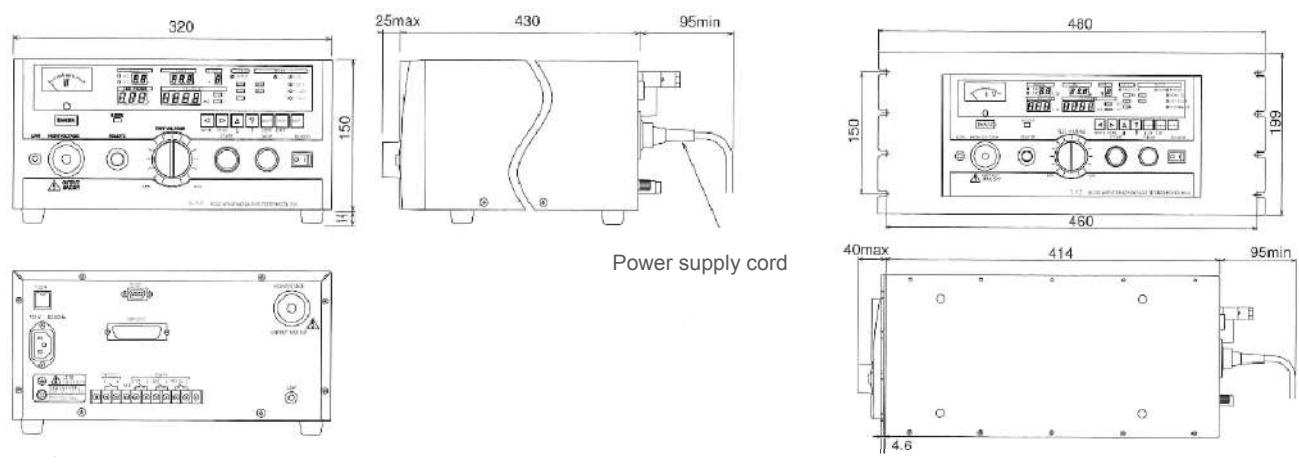

## ■ Basic Specifications

<b>Model &amp; Output</b>	8526 : RS-232C
<b>Measurement voltage</b>	AC 0 to 2.5KV, 0 to 5.0KV, 2 ranges DC 0 to 2.5KV, 0 to 5.0KV, 2 ranges
<b>Voltage output system</b>	Zero-cross throw switch
<b>Setting of voltage</b>	Manual setting by volt slider
<b>Accuracy of Voltage</b>	± 1.5 % of F.S.
<b>Measurement current</b>	AC from 0.01mA to 110.0mA DC from 0.01mA to 11.0mA
<b>Accuracy of current</b>	± (5 % + 20 µA) for high setting value
<b>Setting time</b>	0.5 to 999 s (with timer OFF function)
<b>Judgement of test result</b>	High & low limit
<b>Power supply</b>	90 to 110V AC, 50/60HZ (Available 115/200/220/240 V)
<b>Weight</b>	Approx. 17 kg (22.5kg for optional power supply)
<b>Dimensions</b>	320 (W) x 150 (H) x 430 (D) mm
<b>Accessories</b>	2m High-voltage cable, 3m Earth wire, 2.5m Power cord, Remote I/O plug, Fuse



TSURUGA ELECTRIC CORPORATION

### Overseas Trade Department

1-3-23 Minami Sumiyoshi, Sumiyoshi, Osaka, Japan 558-0041

Tel: +81-(0)6-6692-7001 Fax: +81-(0)6-6692-7004

Home page: <http://www.tsuruga.co.jp>

Factory : Osaka and Shiga  
Sale Offices : Osaka, Nagoya,  
Tokyo, Yokohama